



VIBRANT SCAFFOLDING


**SALES AND HIRING (CONSTRUCTION EQUIPMENT) |
CIVIL CONTRACTING**

**CONTACT US:
ABDUL MATEEN
AT +91-9742571617
INFO@VIBRANTSCAFFOLDING.COM**

You can find us at:
No.455/17/18/2,
2nd main road, 3rd cross,
Kattegenahalli,
Bengaluru - 560063



OUR PRODUCTS

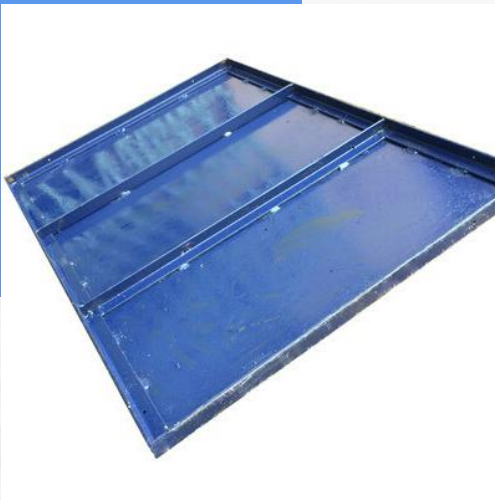

Shuttering Sheets (Centering Sheets)

Shuttering Sheets are the main supporting components in formwork systems for the construction of slabs, beams, etc.

Specifications:

Size : 3ft x 2ft

L angle frame : 25mm x 4mm thick

Sheet : 14 Gauge (2mm)

Weight : 15.2kg - 15.5 kg

Standard Cuplocks

VERTICALS

The verticals are of medium class conforming to IS 1161/1239. Vertical Members are available in lengths of 3m, 2.5m, 2.0m, 1.5m & 1m. Cups are generally provided at 500mm c/c or 1000mm c/c. The stagnant bottom welded cups are made from a forged high-quality steel; while the movable top cups are made from malleable cast iron. Spigots of 150mm length are usually provided to ease the process of assembly. We also do provide 2, 3 and 6 cups for every 3m verticals as per customer requirements.

CUPLOCK LEDGER PLATE / HORIZONTALS

The horizontals are made out of 50mm tube of medium/light strength conforming to IS 1161 / 1239; with forged end blades welded at both ends. Standard sizes available are 1.2m, 1.5m, 1.8m, 2.0m, 2.5m.



Accrow Spans


Adjustable Accrow Spans are widely used for self-supporting runners.

Specifications:

Main body (Outer & Inner) : 14/12-gauge MS sheet

Outer member (Bottom) : 50mm x 6mm MS plate

Inner T angle : 40mm x 40mm x 6mm Inner T angle

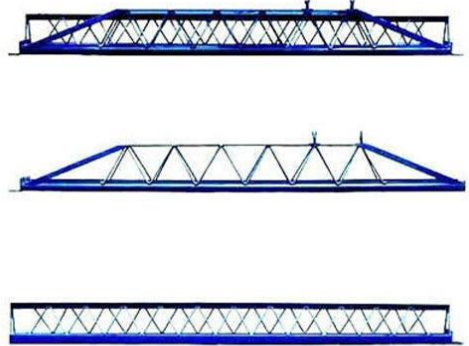

Telescopic Props

Specifications:

Manufactured using steel tubes conforming ISI

Standards Plates : 150mm x 150mm x 5mm

Outer Pipe : 50NB[60.3mm ϕ] medium class

Inner Pipe : 40NB[48.3mm ϕ] medium class


We at Vibrant Scaffoldings have the following telescopic props available:

Size	Min ht.	Max ht.	Weight
TPS-1	1.5m	2.75m	15.5kg
TPS-2	2.0m	3.25m	16.5kg
TPS-3	2.0m	3.75m	17.5kg
TPS-4	3.0m	4.80m	21.5kg

H-Frames

STANDARD SIZE: 2000mm x 1000mm

H-frames are made out of 2 vertical tubes and 2 horizontal tubes of 42φ/48φ respectively. The lock pins of 5/8 round rods are provided on vertical members to facilitate the interlocking of cross braces. Spigots are provided on the top/bottom to facilitate easy assembly of frames.

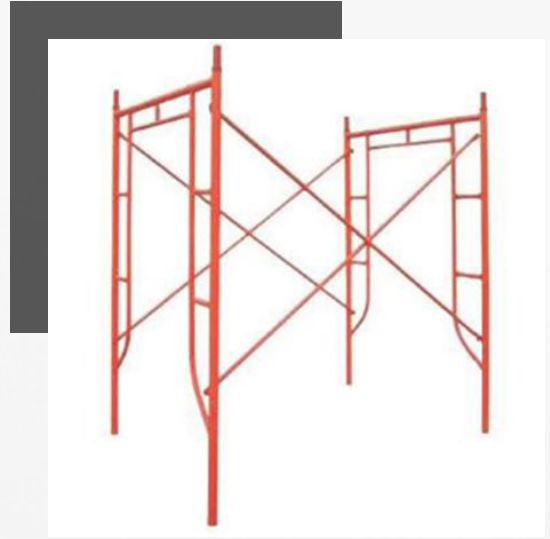

SCAFFOLDING ACCESSORIES

